

SE TYPE - SINGLE EYE CABLE SOCKS

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES


- ✓ Available in galvanised steel or stainless steel
- ✓ Suitable for underground installations
- ✓ Fits easily onto electrical cables

Ideal for pulling light to medium loads; typical application - 'standard pull' of single or group of cables, where additional support is unnecessary, or if used in conjunction with other cable socks.

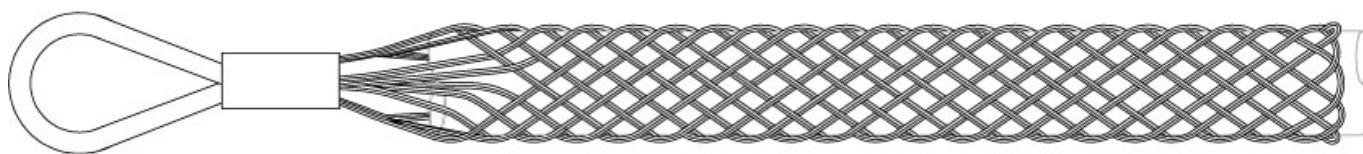

L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

 +61 3 8840 6556

 sales@slingcoaustralia.com.au

SE TYPE - SINGLE EYE CABLE SOCKS

Single Eye Standard Sock - Galvanised

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS0320	6 - 13	0.25 - 0.50	Single	230	9	305	12	760	1,680
ZCS0321	13 - 19	0.50 - 0.75	Single	355	14	430	17	1,015	2,240
ZCS0322	19 - 25	0.75 - 1.00	Single	405	16	510	20	2,540	5,600
ZCS0323	25 - 38	1.00 - 1.50	Single	455	18	610	24	3,555	7,840
ZCS0324	38 - 50	1.50 - 2.00	Double	535	21	735	29	3,992	8,800
ZCS0325	50 - 63	2.00 - 2.50	Double	610	24	865	34	5,080	11,200
ZCS0326	63 - 89	2.50 - 3.50	Double	685	27	990	39	6,095	13,440
ZCS0327	89 - 115	3.50 - 4.50	Double	685	27	990	39	7,110	15,680
ZCS0821	115 - 140	4.50 - 5.50	Double	685	27	990	39	7,110	15,680
ZCS3574	135 - 160	5.31 - 6.30	Double	900	36.9	1,380	49.8	20,000	44,000
ZCS3575	160 - 190	6.3 - 7.48	Double	1,500	57.2	2,000	78.7	20,000	44,000
ZCS3576	190 - 220	7.48 - 8.66	Double	1,500	61.9	2,000	81.6	20,000	44,000
ZCS3577	220 - 250	8.66 - 9.84	Double	1,500	59.7	2,000	72.7	20,000	44,000
ZCS3578	250 - 300	9.84 - 11.81	Single	2,000	80.0	2,600	93.3	20,000	44,000

Single Eye Standard Sock - 316 Stainless Steel

Slingco Part No.	Range (mm)	Range (in)	Lattice Weave	Lattice Length (mm)	Lattice Length (in)	Overall Length (mm)	Overall Length (in)	Approx. Break Load (kg)	Approx. Break Load (lb)
ZCS1380	6 - 13	0.25 - 0.50	Single	230	9	305	12	610	1,344
ZCS1523	13 - 19	0.50 - 0.75	Single	355	14	430	17	810	1,792
ZCS1373	19 - 25	0.75 - 1.00	Single	405	16	510	20	2,030	4,480
ZCS1952	25 - 38	1.00 - 1.50	Single	455	18	610	24	2,845	6,272
ZCS1381	38 - 50	1.50 - 2.00	Double	535	21	735	29	4,065	8,960
ZCS1977	50 - 63	2.00 - 2.50	Double	610	24	865	34	4,065	8,960
ZCS1979	63 - 89	2.50 - 3.50	Double	685	27	990	39	4,875	10,752
ZCS1980	89 - 115	3.50 - 4.50	Double	685	27	990	39	5,690	12,544
ZCS1981	115 - 140	4.50 - 5.50	Double	685	27	990	39	5,690	12,544

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Australia Pty. Ltd



L9, 1 York Street, Sydney, NSW 2000, Australia Sales: +61 3 8840 6556

GET IN TOUCH

+61 3 8840 6556

sales@slingcoaustralia.com.au

SE TYPE - SINGLE EYE CABLE SOCKS

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/-10%. Please contact us if you have any questions.

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



L9, 1 York Street, Sydney, NSW 2000, Australia **Sales:** +61 3 8840 6556

GET IN TOUCH



+61 3 8840 6556



sales@slingcoaustralia.com.au