

MD TYPE - MEDIUM DUTY PULLING GRIPS

⚠ WARNING


Cancer and Reproductive Harm: www.P65Warnings.ca.gov



KEY FEATURES

- ✓ Double-weave construction
- ✓ Colour coded for ease of identification
- ✓ Protective shoulders to prevent abrasion
- ✓ Suitable for bare or insulated conductors
- ✓ Flexible eye compatible with Line swivels

The HD, MD and LD type form a range of conductor grips that are quick and easy to attach and remove, in sizes from 8mm to 48mm, with MBL up to 24,000kgs and WLL 8,000kg. They are suitable for all common conductors, e.g. Horse, Lynx, Upas, Zebra and Araucaria plus earth wires OPGW. The flexible eye connects with Slingco line pulling swivels for trouble-free pulling applications. Made of galvanised steel.

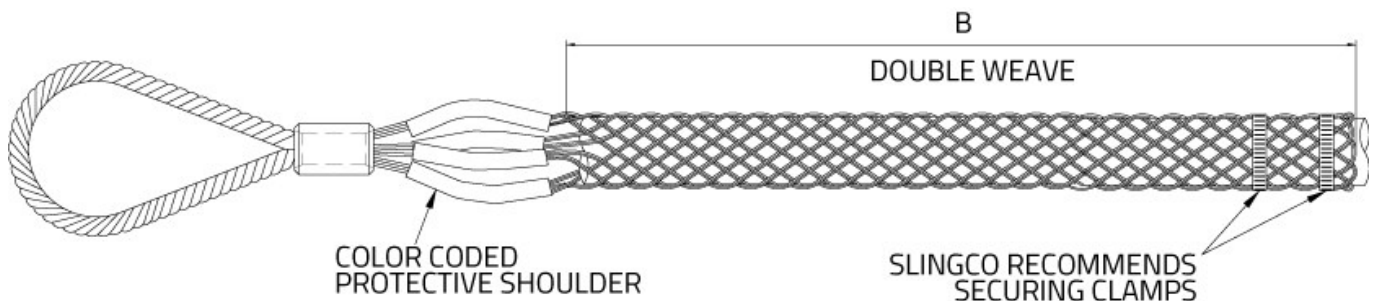

Slingco Part No.	Colour Code	Range (in)	Range (mm)	Lattice Length (in)	Lattice Length (mm)	Min. Break Load (lb)	Min. Break Load (kg)	WLL (lb)	WLL (kg)
ZCS7229	Green	0.31 - 0.51	8 - 13	24	610	4,960	2,250	1,653	750
ZCS7230	Brown	0.47 - 0.75	12 - 19	24	610	7,452	3,380	2,484	1,127
ZCS7231	Light Blue	0.75 - 0.98	19 - 25	24	610	12,214	5,540	4,071	1,847
ZCS7232	Gold	0.98 - 1.26	25 - 32	24	610	21,054	9,550	7,018	3,183

This information is for marketing purposes only. The details contained herein is presented as general information and no representation or warranty is expressly or impliedly given as to its accuracy, completeness or correctness. It does not constitute part of a legal offer or contract. For technical specifications, please contact Slingco Limited.

Dimensions

The figures shown are indicative only. Fully dimensioned data-sheets are available on request. Nominal figures/actuals are as per data-sheet with tolerances of +/- 10%. Please contact us if you have any questions.



GET IN TOUCH

01706 855 558


sales@slingco.com

MD TYPE - MEDIUM DUTY PULLING GRIPS

Range dimension overlaps If the cable, rope or hose you have lies where ranges overlap, e.g. 1" when sizing is 0.5-1.00 and 1.00-1.5 we recommend that you select your cable grip to achieve break load first. If tensile strengths are equal or both adequate, choose the smaller of the two. Please contact us if you have any questions.



GET IN TOUCH

 01706 855 558

 sales@slingco.com

Slingco Ltd, Gateway Business Park, New Hall Hey Road, Rawtenstall, BB4 6JG t: 01706 855558
Slingco America Inc, 3100 Jonquil Drive SE, Smyrna, Georgia, 30080, USA t: 888 685 9478